


云母玻璃绝缘超高温加热器安装线

HTMG系列



- ✓ 450°C (842°F)额定温度
- ✓ CSA认证，NRTL和UL列名
- ✓ 单根镀镍（27%镍）铜绞线
- ✓ 带表面处理玻璃纤维编织套管的云母带绝缘层

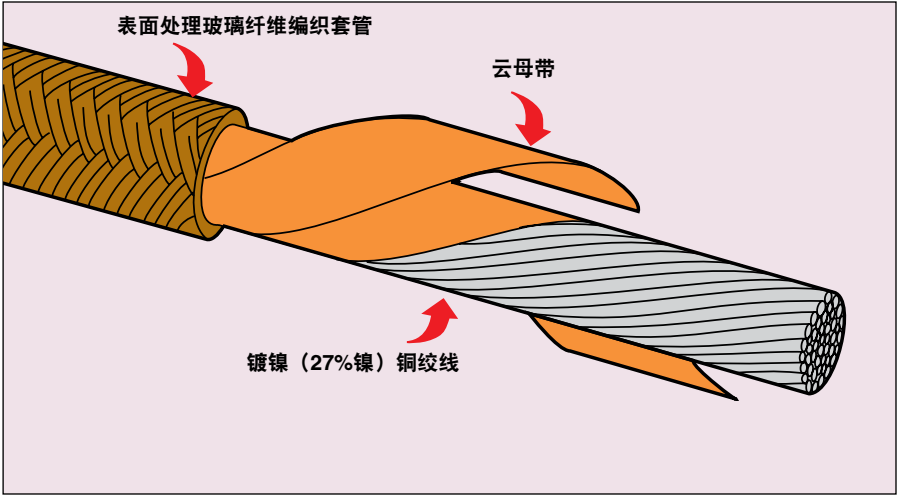

HTMG高温导线设计用于各种器具和工业加热产品—如商业食品服务设备、加热器、热处理炉、窑炉、加热器元件及其他高达450°C (842°F)的应用。

折扣表	
50 ~ 99 ft.	10%
100 ~ 199 ft.	15%
200 ~ 499 ft.	20%
499 ft以上	25%

如欲订购， 请访问 cn.omega.com/htmg ， 了解价格和详情					
线规	型号	绞线	伏	标称外径 mm (inch)	大致重量 kg/300 m (lb/1000')
22	HTMG-1CU-322S/C	7 x 30	300	2.0 (0.08)	2.5 (5.5)
22	HTMG-1CU-622S/C		600	2.6 (0.10)	3.2 (7.0)
20	HTMG-1CU-320S/C	10 x 30	300	2.1 (0.08)	3.2 (7.0)
20	HTMG-1CU-620S/C		600	2.8 (0.11)	4.1 (9.0)
18	HTMG-1CU-318S/C	16 x 30	300	2.4 (0.10)	4.3 (9.5)
18	HTMG-1CU-618S/C		600	3.0 (0.12)	5.2 (11.5)
16	HTMG-1CU-316S/C	26 x 30	300	2.7 (0.11)	5.9 (13.0)
16	HTMG-1CU-616S/C		600	3.3 (0.13)	6.8 (15.0)
14	HTMG-1CU-314S/C	41 x 30	300	3.0 (0.12)	8.4 (18.5)
14	HTMG-1CU-614S/C		600	3.7 (0.14)	9.5 (21.0)
12	HTMG-1CU-312S/C	65 x 30	300	3.5 (0.14)	12.2 (27.0)
12	HTMG-1CU-612S/C		600	4.1 (0.16)	13.4 (29.5)
10	HTMG-1CU-310S/C	105 x 30	300	5.1 (0.20)	21.1 (46.5)
10	HTMG-1CU-610S/C		600	5.7 (0.22)	22.9 (50.5)
8	HTMG-1CU-308S/C	133 x 29	300	6.0 (0.23)	31.8 (70.0)
8	HTMG-1CU-608S/C		600	6.1 (0.26)	34.2 (75.5)

标准颜色: 自然色（褐色）。
订购示例: HTMG-1CU-322S/C, 100' 22 号线规绞线线轴。
有关载流容量和降额，请参见加热器安装线说明。